

**特性 FEATURES :**

- \* RoHS適合, 鉛フリー RoHS-compliant, Pb Free
- \* 定格電流値 : 50mA - 3.75A
- \* 最大電圧値 : 60V
- \* 使用温度範囲 : -40°C~+85°C

**承認 Approvals :**

- \* UL Recognized; File E211981
- \* c-UL Recognized; File E211981
- \* TUV; R50004084




**FRX SERIES**

**電気的特性 ELECTRICAL CHARACTERISTICS (23°C) :**

Part Number	Hold Current	Trip Current	Max. Time to Trip	Maximum Current	Rated Voltage	Typical Power	Resistance Tolerance	
							R <sub>MIN</sub>	R <sub>1MAX</sub>
	I <sub>H</sub> , A	I <sub>T</sub> , A	at 5xI <sub>H</sub>	I <sub>MAX</sub> , A	V <sub>MAX</sub> , V <sub>DC</sub>	P <sub>d</sub> , W	ohms	ohms
FRX005-60F	0.05	0.10	5.0	40	60	0.26	7.30	20.0
FRX010-60F	0.10	0.20	4.0	40	60	0.38	2.50	7.50
FRX017-60F	0.17	0.34	3.0	40	60	0.48	2.00	8.00
FRX020-60F	0.20	0.40	2.2	40	60	0.41	1.83	4.40
FRX025-60F	0.25	0.50	2.5	40	60	0.45	1.25	3.00
FRX030-60F	0.30	0.60	3.0	40	60	0.49	0.88	2.10
FRX040-60F	0.40	0.80	3.8	40	60	0.56	0.55	1.29
FRX050-60F	0.50	1.00	4.0	40	60	0.77	0.50	1.17
FRX065-60F	0.65	1.30	5.3	40	60	0.88	0.31	0.72
FRX075-60F	0.75	1.50	6.3	40	60	0.92	0.25	0.60
FRX090-60F	0.90	1.80	7.2	40	60	0.99	0.20	0.47
FRX110-60F	1.10	2.20	8.2	40	60	1.50	0.15	0.38
FRX135-60F	1.35	2.70	9.6	40	60	1.70	0.12	0.30
FRX160-60F	1.60	3.20	11.4	40	60	1.90	0.09	0.22
FRX185-60F	1.85	3.70	12.6	40	60	2.10	0.08	0.19
FRX250-60F	2.50	5.00	15.6	40	60	2.50	0.05	0.13
FRX300-60F	3.00	6.00	19.8	40	60	2.80	0.04	0.10
FRX375-60F	3.75	7.50	24.0	40	60	3.20	0.03	0.08

**トリップ特性 (代表値)**

Typical Time-to-trip at 23°C :

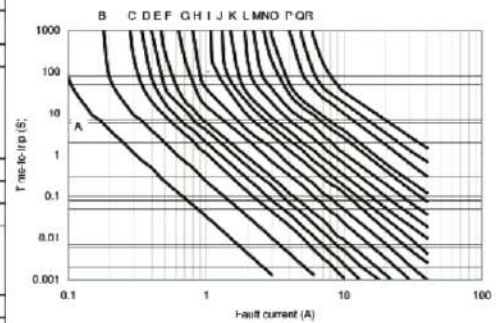

- A = FRX005-60F
- B = FRX010-60F
- C = FRX017-60F
- D = FRX020-60F
- E = FRX025-60F
- F = FRX030-60F
- G = FRX040-60F
- H = FRX050-60F
- I = FRX065-60F
- J = FRX075-60F
- K = FRX090-60F
- L = FRX110-60F
- M = FRX135-60F
- N = FRX160-60F
- O = FRX185-60F
- P = FRX250-60F
- Q = FRX300-60F
- R = FRX375-60F

**寸法 DIMENSIONS :**




FRX 005-60F - FRX 090-60F  
Lead Size : 24AWG  
Φ 0.51 mm Diameter

FRX 110-60F - FRX 375-60F  
Lead Size : 20AWG  
Φ 0.81 mm Diameter

Part Number	A Maximum	B Maximum	C Typical	D Minimum	E Maximum	F Typical
FRX005-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX010-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX017-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX020-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX025-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX030-60F	7.4	13.0	5.1	7.6	3.1	1.1
FRX040-60F	7.6	13.5	5.1	7.6	3.1	1.1
FRX050-60F	7.9	13.7	5.1	7.6	3.1	1.1
FRX065-60F	9.7	14.5	5.1	7.6	3.1	1.1
FRX075-60F	10.4	15.2	5.1	7.6	3.1	1.1
FRX090-60F	11.7	15.8	5.1	7.6	3.1	1.1
FRX110-60F	13.0	18.0	5.1	7.6	3.1	1.4
FRX135-60F	14.5	19.8	5.1	7.6	3.1	1.4
FRX160-60F	16.3	21.3	5.1	7.6	3.1	1.4
FRX185-60F	17.8	22.9	5.1	7.6	3.1	1.4
FRX250-60F	21.3	26.4	10.2	7.6	3.1	1.4
FRX300-60F	24.9	30.0	10.2	7.6	3.1	1.4
FRX375-60F	28.5	33.5	10.2	7.6	3.1	1.4

**温度ディレイティングカーブ**  
Thermal Derating Curve - FRX Series

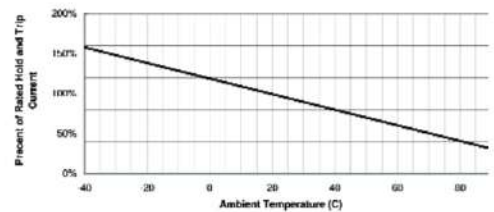

\*FRX-90F (90V) シリーズについては PICO にお問い合わせ下さい。 Ask PICO for FRX90V and other items.