

特性 FEATURES:

- 5 x 20mm ガラス管 速断タイプ
- RoHS 適合品

5x20mm Fast-Acting Glass Tube Fuse
RoHS-Compliant Products

規格承認 APPROVALS:


- UL Listed [32mA-2.5A 125V/250V] [3-8A 125V]
- UL Recognized [3-8A 250V]
- CSA Certified [32mA-8A 125V/250V]
- METI (PSE) [1A-15A 125V/250V]
- KC [100mA-7A 250V]




51NM/52NM SERIES

寸法 DIMENSIONS:

51NM



51NM(P) / 52NM

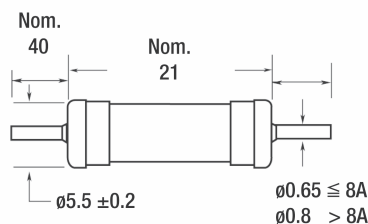


Unit
単位: mm

電気的特性 ELECTRICAL CHARACTERISTICS:

電流値 % of Ampere Rating	溶断時間 Opening Time
100%	4 時間最小 hours Min.
135%	1 時間最大 hour Max.
200%	5 秒最大 sec Max.

溶断曲線 AVERAGE TIME-CURRENT CURVES:

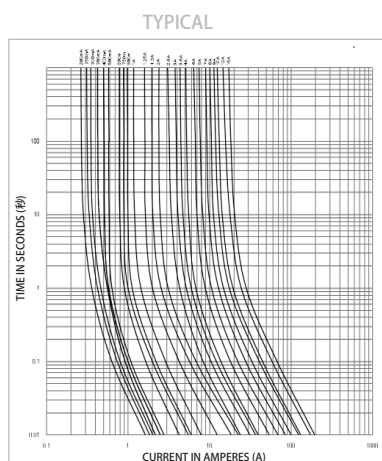

仕様 SPECIFICATIONS:

品名 Product Code	電流値 Ampere Rating	電圧 Voltage Rating H / L (VAC)	I _t t 値 Typical Pre-Arcing I _t t (A ² sec) ^{*2}	品名 Product Code	電流値 Ampere Rating	電圧 Voltage Rating H / L (VAC)	I _t t 値 Typical Pre-Arcing I _t t (A ² sec) ^{*2}
51NM / 52NM -0200H/L	200mA	250V / 125V	0.02697	51NM / 52NM -016H/L	1.6 A	250V / 125V	3.450
51NM / 52NM -0250H/L	250mA	250V / 125V	0.03371	51NM / 52NM -020H/L	2 A	250V / 125V	5.149
51NM / 52NM -0300H/L	300mA	250V / 125V	0.04045	51NM / 52NM -025H/L	2.5 A	250V / 125V	5.761
51NM / 52NM -0315H/L	315mA	250V / 125V	0.04247	51NM / 52NM -030H/L	3 A	250V / 125V	9.722
51NM / 52NM -0350H/L	350mA	250V / 125V	0.04719	51NM / 52NM -032H/L	3.15 A	250V / 125V	9.835
51NM / 52NM -0400H/L	400mA	250V / 125V	0.06145	51NM / 52NM -035H/L	3.5 A	250V / 125V	13.52
51NM / 52NM -0500H/L	500mA	250V / 125V	0.07681	51NM / 52NM -040H/L	4 A	250V / 125V	15.80
51NM / 52NM -0600H/L	600mA	250V / 125V	0.1224	51NM / 52NM -050H/L	5 A	250V / 125V	29.11
51NM / 52NM -0630H/L	630mA	250V / 125V	0.1790	51NM / 52NM -060H/L	6 A	250V / 125V	47.42
51NM / 52NM -0700H/L	700mA	250V / 125V	TBA	51NM / 52NM -063H/L	6.3 A	250V / 125V	59.24
51NM / 52NM -0750H/L	750mA	250V / 125V	0.3040	51NM / 52NM -070H/L	7 A	250V / 125V	73.10
51NM / 52NM -0800H/L	800mA	250V / 125V	0.3550	51NM / 52NM -080H/L	8 A	250V / 125V	100.0
51NM / 52NM -010H/L	1 A	250V / 125V	0.6167	51NM / 52NM -090H/L	9 A	250V / 125V	153.9
51NM / 52NM -012H/L	1.2 A	250V / 125V	1.400	51NM / 52NM -100H/L	10 A	250V / 125V	171.0
51NM / 52NM -013H/L	1.25 A	250V / 125V	1.540	51NM / 52NM -120H/L	12 A	250V / 125V	306.2
51NM / 52NM -015H/L	1.5 A	250V / 125V	2.076	51NM / 52NM -150H/L	15 A	250V / 125V	382.8

• 定格電圧 Voltage Rating : H - 250VAC / L - 125VAC

• 遮断定格 Interrupting Rating : 10,000A 125VAC (32mA-8A)
(UL/CSA) 35A 250VAC (32mA-1A)
100A 250VAC (1.2A-3.5A)
200A 250VAC (4A-8A)

* I_tt 値 - ヒューズの定格電流値の10倍にて溶断した際に測定

• 遮断定格 Interrupting Rating : 100A 125VAC (51NM: 1-15A)
(電安 PSE) 500A 125VAC (52NM/51NM(P): 1-15A)
100A 250VAC (51NM/52NM/51NM(P): 1A-15A)
(韓国 KC) 100A 250VAC (100mA-7A)

* Typical Melting I_tt - Measured at 10 times of rated current under DC.