



特性 FEATURES: 6 x 30mm UL / CSA ガラス管ヒューズ 6 x 30 mm UL/CSA Glass Tube Fuse

- 61NM/62NM: 速断 (普通溶断) タイプ
- 61MS/62MS: 耐ラッシュタイプ
- RoHS 適合品

- 61NM/62NM: Fast-Acting (Normal Blow) Type
- 61MS/62MS: Medium Blow Type
- RoHS-Compliant Products

規格承認 APPROVALS:

61NM / 62NM

- UL/cUL Listed [32mA-10A 125V/250V]
- UL/cUL Recognized [12-30A 32V]
- CSA Certified [32mA-10A 125V/250V]
- METI (PSE) [1A-30A 125V/250V]
- KC [100mA-10A 250V]

61MS / 62MS


- UL/cUL Listed [100mA-5A 125V] / [100mA-1.6A 250V]
- CSA Certified [100mA-5A 125V/250V]
- METI (PSE) [1A-30A 125V/250V]
- KC [100mA-15A 250V]




61NM/62NM, 61MS/62MS SERIES

寸法 DIMENSIONS:

61NM
61MS



62NM
62MS

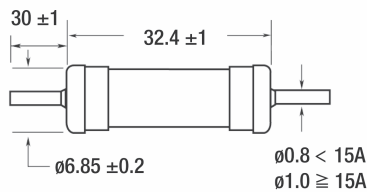


Unit
単位: mm

電気的特性 ELECTRICAL CHARACTERISTICS:


電流値 % of Ampere Rating	溶断時間 Opening Time
100%	4 時間 最小 hours Min.
135%	1 時間 最大 hour Max.
200%	61NM / 62NM 5 秒最大 sec Max.
	61MS / 62MS 20 秒最大 sec Max.

溶断曲線 AVERAGE TIME-CURRENT CURVES:

61NM / 62NM TYPICAL

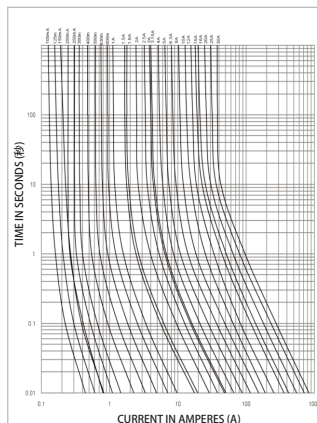

61MS / 62MS TYPICAL

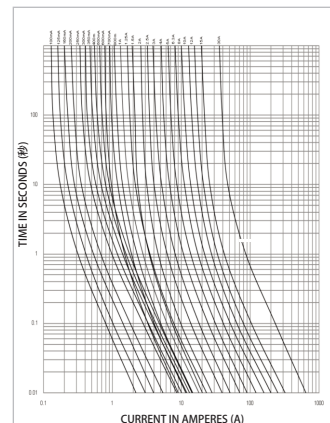

仕様 SPECIFICATIONS:

品名 Product Code 61NM / 62NM	品名 Product Code 61MS / 62MS	電流値 Ampere Rating	電圧 Voltage Rating H / L (VAC)	品名 Product Code 61NM / 62NM	品名 Product Code 61MS / 62MS	電流値 Ampere Rating	電圧 Voltage Rating H / L (VAC)
61NM / 62NM -0100H/L	61MS / 62MS -0100H/L	100mA	250V / 125V	61NM / 62NM -013H/L	61MS / 62MS -013H/L	1.25 A	250V / 125V
61NM / 62NM -0125H/L	61MS / 62MS -0125H/L	125mA	250V / 125V	61NM / 62NM -015H/L	61MS / 62MS -015H/L	1.5 A	250V / 125V
61NM / 62NM -0150H/L	61MS / 62MS -0150H/L	150mA	250V / 125V	61NM / 62NM -016H/L	61MS / 62MS -016H/L	1.6 A	250V / 125V
61NM / 62NM -0160H/L	61MS / 62MS -0160H/L	160mA	250V / 125V	61NM / 62NM -020H/L	61MS / 62MS -020H/L	2 A	250V / 125V
61NM / 62NM -0200H/L	61MS / 62MS -0200H/L	200mA	250V / 125V	61NM / 62NM -025H/L	61MS / 62MS -025H/L	2.5 A	250V / 125V
61NM / 62NM -0250H/L	61MS / 62MS -0250H/L	250mA	250V / 125V	61NM / 62NM -030H/L	61MS / 62MS -030H/L	3 A	250V / 125V
61NM / 62NM -0300H/L	61MS / 62MS -0300H/L	300mA	250V / 125V	61NM / 62NM -032H/L	61MS / 62MS -032H/L	3.15 A	250V / 125V
61NM / 62NM -0315H/L	61MS / 62MS -0315H/L	315mA	250V / 125V	61NM / 62NM -035H/L	61MS / 62MS -035H/L	3.5 A	250V / 125V
61NM / 62NM -0350H/L	61MS / 62MS -0350H/L	350mA	250V / 125V	61NM / 62NM -040H/L	61MS / 62MS -040H/L	4 A	250V / 125V
61NM / 62NM -0375H/L	61MS / 62MS -0375H/L	375mA	250V / 125V	61NM / 62NM -050H/L	61MS / 62MS -050H/L	5 A	250V / 125V
61NM / 62NM -0400H/L	61MS / 62MS -0400H/L	400mA	250V / 125V	61NM / 62NM -060H/L	61MS / 62MS -060H/L	6 A	250V / 125V
61NM / 62NM -0500H/L	61MS / 62MS -0500H/L	500mA	250V / 125V	61NM / 62NM -063H/L	61MS / 62MS -063H/L	6.3 A	250V / 125V
61NM / 62NM -0600H/L	61MS / 62MS -0600H/L	600mA	250V / 125V	61NM / 62NM -070H/L	61MS / 62MS -070H/L	7 A	250V / 125V
61NM / 62NM -0630H/L	61MS / 62MS -0630H/L	630mA	250V / 125V	61NM / 62NM -080H/L	61MS / 62MS -080H/L	8 A	250V / 125V
61NM / 62NM -0700H/L	61MS / 62MS -0700H/L	700mA	250V / 125V	61NM / 62NM -090H/L	61MS / 62MS -090H/L	9 A	250V / 125V
61NM / 62NM -0750H/L	61MS / 62MS -0750H/L	750mA	250V / 125V	61NM / 62NM -100H/L	61MS / 62MS -100H/L	10 A	250V / 125V
61NM / 62NM -0800H/L	61MS / 62MS -0800H/L	800 A	250V / 125V	61NM / 62NM -120H/L	61MS / 62MS -120H/L	12 A	250V / 125V
61NM / 62NM -010H/L	61MS / 62MS -010H/L	1 A	250V / 125V	61NM / 62NM -150H/L	61MS / 62MS -150H/L	15 A	250V / 125V
61NM / 62NM -012H/L	61MS / 62MS -012H/L	1.2 A	250V / 125V				

• 定格電圧 Voltage Rating: H - 250VAC / L - 125VAC

• 遮断定格 Interrupting Rating: 61NM / 62NM - 10,000A 125VAC (32mA-10A)
35A 250VAC (32mA-1A)
100A 250VAC (1.2A-3.5A)
200A 250VAC (4A-10A)
300A 32VAC/DC (12-30A)

61MS / 62MS - 10,000A 125VAC (32mA-5A)
35A 250VAC (100mA-1A)
100A 250VAC (1.2A-3.5A)
200A 250VAC (4A-5A)