


SGHK / MSGHK

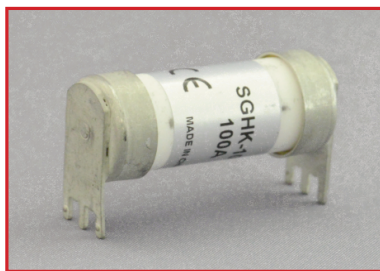

特長：

- 半導体保護用 ハイスピードヒューズ
- 優れた速断性
- 高遮断容量 (100kA)
- 基板実装型端子構造

電氣的特性：

定格電圧：AC 690V / DC 550V (SGHK)
DC 550V (MSGHK)

遮断容量 (UL)：100kA

Features:



- High Speed Fuses for semiconductor protection
- Excellent Quick Action Performance
- High Breaking Capacity (100kA)
- PC board mount terminal structure

Electrical Characteristics:


Voltage Rating

Breaking Capacity



SGHK / MSGHK HIGH SPEED FUSE

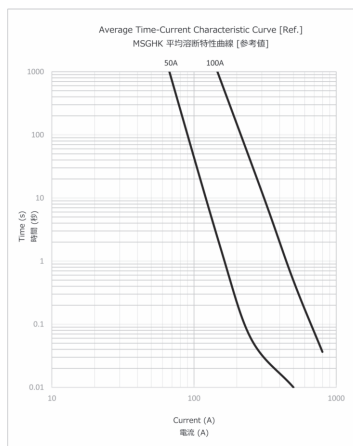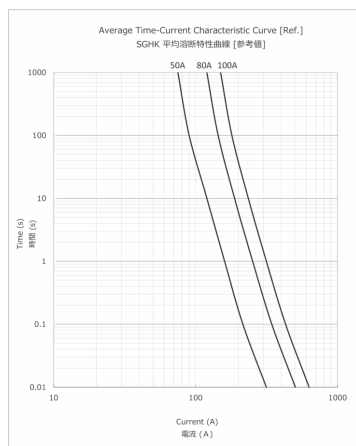

温度上昇 Temperature Rise

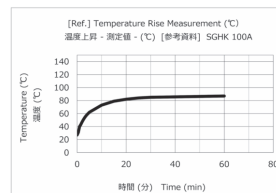

電力損失 Power Losses

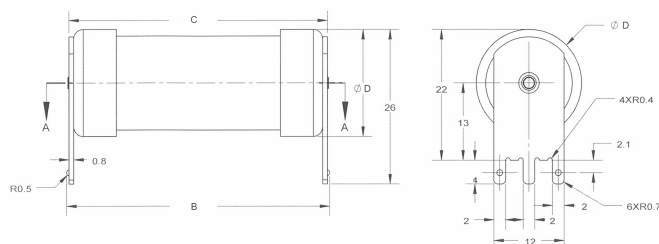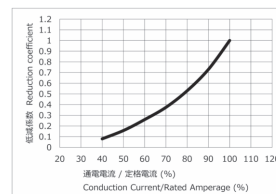

仕様 SPECIFICATION：

Catalog Number 品番	Rated Current 定格電流値 (A)	Rated Voltage 定格電圧 (V)	Interrupting Rating 遮断定格 (kA)	Typical Melting I^2t 溶断 I^2t [代表値] (A ² s)	Dimensions 寸法 (mm)		
					B	C	D
SGHK-50	50A	690V AC 550V DC	100KA	190	44.6	43.8	18
SGHK-80	80A			480			
SGHK-100	100A			620			
MSGHK-50	50A	550V DC	100kA	126	34	35.3	17.8
MSGHK-100	100A			1092			

注 NOTE:

1. 遮断定格：力率 100% (AC)
L/R=10ms (DC)

AC I.R.: P.F. 100%
DC I.R.: L/R 10ms

2. 溶断 I^2t ：1ms 測定時 (SGHK) [代表値]
2ms 測定時 (MSGHK) [代表値]

Typical Melting I^2t : measured
at 1ms (SGHK) / at 2ms (MSGHK)