



SSFK40

特長：

- 基板実装型端子構造
- 優れた速断性
- I^2t が小さく半導体との保護強調が容易

電気的特性：

定格電圧：AC 400V / DC 400V (5A~30A)
AC 400V / DC 360V (35A~60A)

遮断容量 (UL)：10kA (AC / DC)



Features:






- PC board mount terminal structure
- Excellent Quick Action Performance
- Low I^2t provides protection of semiconductors with easy coordination

Electrical Characteristics:

Voltage Rating

Breaking Capacity

SSFK40 HIGH SPEED FUSE

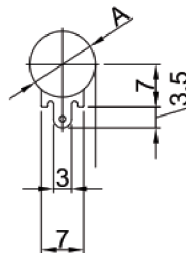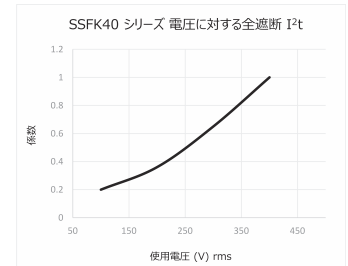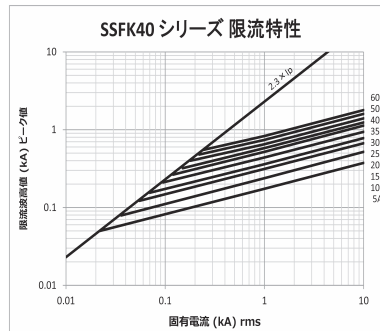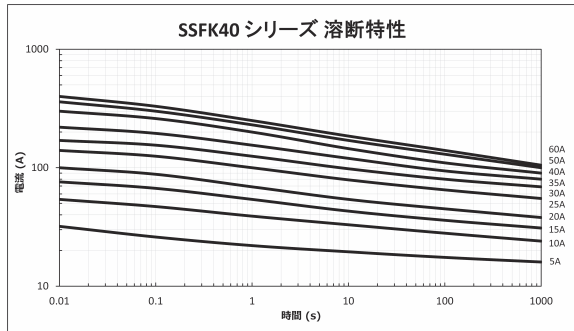

仕様 SPECIFICATION：

Model 型 式	Rated Current 定格電流 rms (V)	Rated Voltage 定格電圧 rms (A)	Breaking Capacity 遮断容量 (kA)	Max. Watt Loss 損出最大値 (W)	I^2t (A ² s) × 10 ³		Outline Dimensions		
					Pre-Arc 溶断	Clearing 全遮断	外形寸法 (単位: mm)		
SSFK40-5U	AC 400 DC 400	5	10kA at AC 400V DC 400V	0.5	0.002	0.03	φ11	10.5	26.5
SSFK40-10U		10		1.1	0.006	0.07			
SSFK40-15U		15		1.7	0.012	0.13			
SSFK40-20U		20		2.9	0.025	0.28			
SSFK40-25U		25		2.9	0.045	0.42			
SSFK40-30U		30		3.9	0.071	0.71			
SSFK40-35U	AC 400 DC 360	35	10kA at AC 400V DC 360V	5.2	0.11	1.10			
SSFK40-40U		40		5.3	0.18	1.67			
SSFK40-50U		50		6.9	0.27	2.15			
* SSFK40-60U		60		7.1	0.32	2.4			

* CCC (aR) 定格電圧・遮断容量 (L/R 10~15ms)

SSFK40-60U

AC 400V - 50kA

DC 260V - 50kA



SSFK60 / SSF60 & STB60 / STB25

特長：

- SSFK60** - 基板実装型端子構造
- SSF60** - 筒形端子構造
- 適合ヒューズホルダー：STB60

Features:

- SSFK60** - PC board mount terminal structure
- SSF60** - Ferruled terminal structure
- Applicable Fuseholder : STB60



電気的特性：




- 定格電圧：AC 600V / DC 660V (5A~30A)
- AC 600V / DC 570V (35A~60A)
- 遮断容量 (UL)：10kA (AC / DC)

Electrical Characteristics:



- Voltage Rating
- Breaking Capacity




SSFK60 / SSF60 HIGH SPEED FUSE & STB-60 / STB-25 Fuseholder

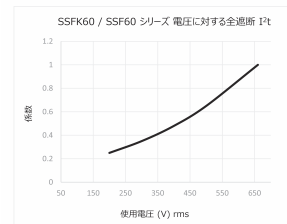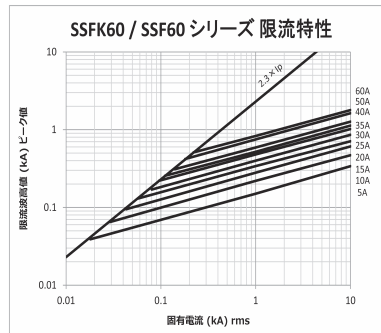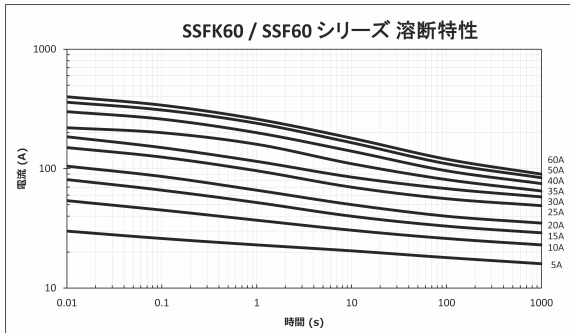

SSFK60



SSF60



仕様 SPECIFICATION：


Model PCB Terminal	Model Ferrule Cap	Rated Current	Rated Voltage	Breaking Capacity	Max. Watt Loss	I^2t (A ² s) × 10 ³		Outline Dimensions				
型 式	型 式	定格電圧	定格電流	遮断容量	損出最大値	Pre-Arc 溶断	Clearing 全遮断	外形寸法 (単位：mm)				
基板実装型	筒形端子	rms (V)	rms (A)	(kA)	(W)			A	B	C	A1	B1
SSFK60-5U	SSF60-5U	AC 660 DC 660	5	10kA at AC 660V DC 660V	0.9	0.002	0.02	φ11	22.5	38	22.5	38
SSFK60-10U	SSF60-10U		10		2.0	0.006	0.06					
SSFK60-15U	SSF60-15U		15		3.3	0.012	0.13					
SSFK60-20U	SSF60-20U		20		5.0	0.025	0.23					
SSFK60-25U	SSF60-25U		25		5.5	0.045	0.36					
SSFK60-30U	SSF60-30U	AC 660 DC 570	30	10kA at AC 660V DC 570V	6.3	0.071	0.58	φ11	22.5	38	22.5	38
SSFK60-35U	SSF60-35U		35		5.3	0.110	0.78					
SSFK60-40U	SSF60-40U		40		5.6	0.180	1.4					
SSFK60-50U	SSF60-50U		50		7.9	0.272	2.25					
SSFK60-60U	SSF60-60U		60		10.3	0.324	2.4					

* CCC (aR) 定格電圧・遮断容量
(L/R 6~10ms)

SSFK60-25U
AC 660V - 50kA
DC 450V - 10kA

STB-60 / STB-25 Fuseholder

STB-25 Fuseholder / SC-25 Cover
for SF25

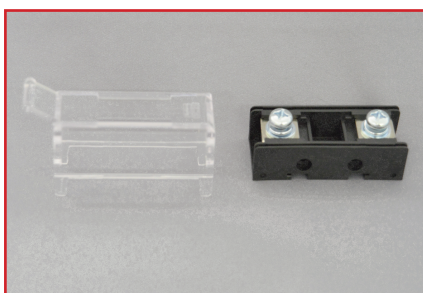

STB-60 Fuseholder / SC-60 Cover
for SSF60

